



Roll-Off Rectangle Style

15-40 Yard Rectangle



Container Specifications:

- 3" x 3.5lb Channel x-member on 18" centers
- 4" x 3" Structural tubing top rails
- 1" Hook plate
- 1 1/4" Cable hook
- 8" x 8" Rear wheel w/ greasable axles
- 4" x 6" Front wheels w/ greasable axles
- (3) Heavy duty greasable hinges (30-yard height and above)
- (3) Cam style latches (30-yard height and above)
- 4" x 3" Structural tubing door frame with center channel
- 3/16" Formed front and rear corner post
- V-style tarp hooks on fronts/sides/doors



	Standard	Med Duty	Heavy Duty
Floor sheet	3/16"	1/4"	1/4"
Main rails	3/16"	1/4"	1/4"
Side walls/front	12ga	12ga	3/16"
Side column spacing	36"	24"	24"
Top Rail	1/8"	1/8"	3/16"

Other Options:

- Tarp, lid and roof options
- Hook lift, dual hook and other skid compatible options
- Other sizes/yardage/specifications available on request

Features and Benefits:

- Front design protects driver from exposure to sharp edges, allows for easy cable placement, and provides added strength to the front of the containers
- Front and Rear door corners are ground smooth to prevent tarp damage
- Front corner wraps installed and solid welded to prevent separation of side walls and front
- Side columns spaced tighter at rear than industry spec 36" to support rear of container
- Exterior walls are welded solid exterior and skip welded inside preventing premature failures causing expensive repair
- 3/16" gusset at rear of container ensures proper door alignment and operation
- Interior top rails are welded solid to prevent premature rusting and rust streaking on the outside of the container.
- Cam latch, safety chains, and greasable 1/2" plate hinges with 1 1/4" hinge pins ensure door securement.
- Front roller and rail rollers with greasable pins to prevent premature wearing of critical parts
- Containers fully primed with exterior painted including bottom from rails outward to prevent premature rusting

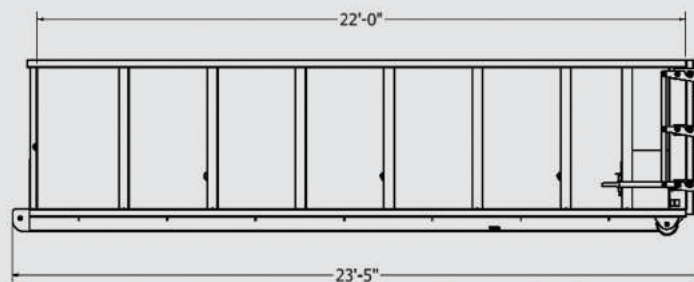

	20-YD	30-YD	40-YD
A	42"	61"	82"
B	53"	72"	93"

