




KEYSTONE
WASTE SOLUTIONS LLC



Concrete Washout Containers

6-12 Yard CWO Roll-Offs

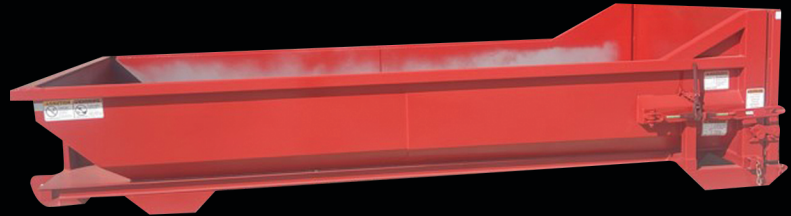

Specifications

- 7 ga one piece floor
- 10 ga front, walls, and door sheets (7 gauge optional)
- Crossmembers on 18" centers (12" optional)
- 6 x 2 x 1/4" structural tubing main rails (bottom)
- 4 x 3 x 3/16 top rails and door perimeter
- T-Seal with (3) ratchet closure
- Door secondary latch keeper
- H2O tested

Feature and Benefits

- Front to rear tapered design allows for easy release of materials for dumping
- Slope front design protects cable hook area from spillage during loading processes
- 1/4" main rail extends life cycle of container compared to industry standard 3/16"
- 12" door extension prevents spillage of contents during loading process
- Stand pads allow more contact with the ground to keep container level on job sites
- H2O test ensures container is liquid tight
- Door latch keeper provides secondary containment of contents
- Slotted hinges protect door gasket from damage during door operations

Other Options:

- Heavy Duty floors and wall options
- Mid bump rail to protect container from side impacts
- 11' - 22' variations
- Hook, cable, and combo pickups
- Extended front stand pads

